

LEAFLET TOPSERTER

CVC MGS



STANDARD FEATURES

- Designed to Meet Relevant cGMP Guidelines, Reducing Cleanup and Inspection
- Easy-to-load Ergonomic Magazine with Outsert Tray Shelf
- The Ability to Incorporate Most Outsert Identification Devices: Bar Code Scanners, Vision and Smart Sensors
- · Four-Head Rotary Outsert Feeder
- · Stainless Steel Floor Stand
- · Screw Adjustable for Bottle Height
- · Vacuum Pump System
- Siemens PLC and Touchscreen Operator Interface
- · Upstream and Downstream Surge Control
- · Missed Outsert Feed Detector
- · No Bottle, No Glue and No Outsert Control
- Nordson Model ProBlue 4 Adhesive System with a Single Orifice Gun



| CVC MGS Technical Specifications | |
|-----------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Туре | U4 |
| Productivity | Up to 180-200 BPM (base on 40-100 cc round bottle, subject to trial confirmation) |
| Applicable Size | Bottle: Dia.: Ø25.4-124 mm (1" to 4 ³ /4") with Cap Height: 63.5-203 mm (2 ¹ /2" to 7 ³ /4") Manual: Length: 25.4-76.2 mm (1 " to 3") Width: 25.4-76.2 mm (1 " to 3") Height: 3-14 mm (¹ /8" to ¹ /2") |
| Power Source | 220 V, 50/60 HZ, 1 PH |
| Power Consumption | 6,710 VA (30.5 A) (Including hot melt feeder system) |
| Air Pressure | 6 bar (87 psi) |
| Air Consumption | 299 NL/min (10.6 CFM) |
| Machine Dimensions (LxWxH) | 2,830 x 1,050 x 2,095 mm (approx) (9'-3" x 3'-6" x 6'-10") |
| Machine Weight | 350 kg (772 lbs) |
| Noise Level | ≤ 70 dB |
| Technical data contained in this material are not binding and may be subject to change without prior notice. | |

Note: The actual rates may vary significantly depending on the following: products, product characteristics, required fill counts, quantity or volume, and bottle dimensions.

TECHNICAL SPECIFICATIONS

AVAILABLE OPTIONS


- · Timing Screw or Random Cycle Bottle Control
- · Servo Drive
- Bar Code Scanners, Vision Systems and Smart Sensors to Identify and Verify Outserts on the Bottle
- Verified Bottle Reject for Missed or Non-identified Outserts
- · Conveyors






MACHINE LAYOUTS

Top View

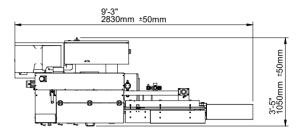

Front View

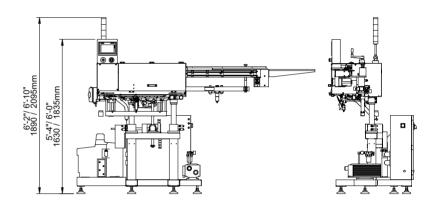

Technical data contained in this material are not binding and may be subject to change without prior notice.





Contact Us

USA

10861 Business Drive, Fontana, CA 92337 Phone: +1 (909) 355-0311 www.cvcusa.com; www.cvctechnologies.com sales@cvcusa.com

Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666 sales@cvctechnologies.com

India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243 sales@cvctechnologies.com

China

Phone: +86 (512) 8363-6368 sales@cvctechnologies.com