




# WRAP-AROUND LABELER

New CVC 302 with IPC System




The new CVC 302 with IPC system is an integrated solution that combines CCD inspection and printing within a single, streamlined interface—eliminating the need for multiple screens.

Its built-in database enables efficient production data storage, quick search, and report generation.


It also supports multi-user login with role-based access control, fully compliant with 21 CFR Part 11 for electronic records and user management.

## STANDARD FEATURES

- Intuitive Touchscreen UI: Simplifies operation and reduces training time.
- Real-Time Alerts & Visual Guidance: Enhances safety and provides immediate troubleshooting cues.
- Quick Manual Access: Instantly view operating guides within the system interface.
- 15" Touchscreen: Larger display for clearer visuals and improved interaction.
- All-in-One Smart Integration: Built-in CCD inspection and thermal printing in a unified interface.
- i-Print System (iPS) is available to be installed in the CVC302 IPC system to print and store reports for CVC packaging line machines.
- Integrated Reporting
  - Report integration (Production/Alarm/Audit)
  - Report query by batch (Production/Alarm/Audit)
  - Independent query (Alarm/Audit)...

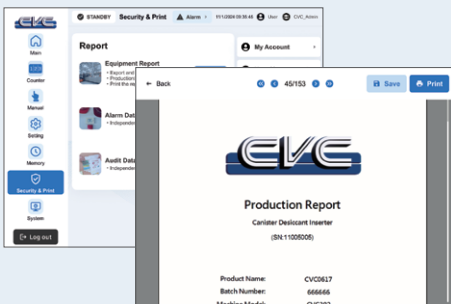

3-color Tower Lamp (option)

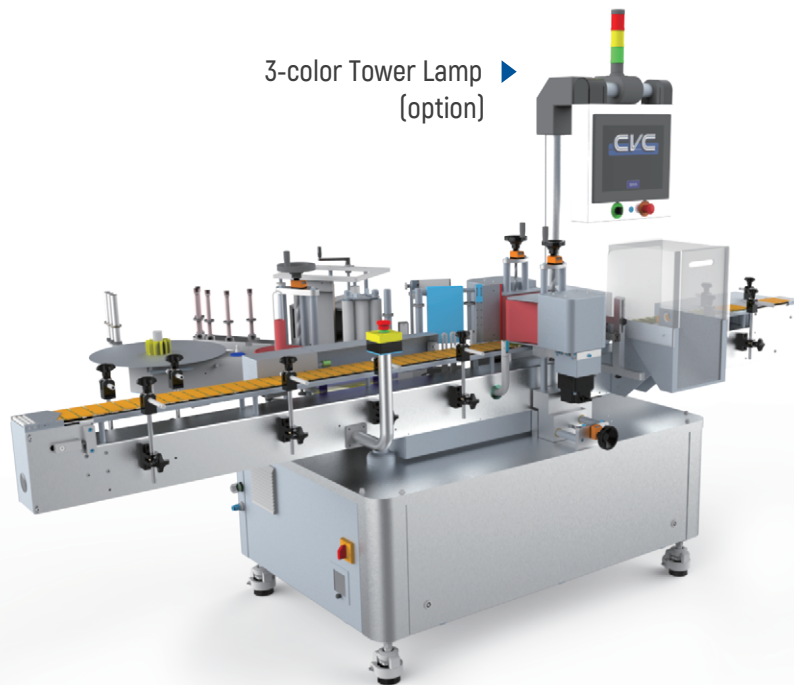


## CVC 302 Technical Specifications

Type	U4
Productivity	Up to 200 BPM (subject to trial confirmation) Up to 250 BPM (Small Bottle with Bottle Feed Screw) Labeling Speed: 75 M/min
Applicable Size	Label: Length: 15-254 mm (5/8" to 10") Width: (depend on label head type) A: 15- 80 mm (5/8" to 3") B: 15-120 mm (5/8" to 4 3/4") C: 15-150 mm (5/8" to 6") D: 15-180 mm (5/8" to 7") E: 15-220 mm (5/8" to 8 3/4") Bottle: Dia.: Ø30-150 mm (1 3/16" to 5 3/4") (depend on conveyor width) Height: 50-320 mm (2" to 12 5/8")
Power Source	220 V, 50/60 HZ, 1 PH
Power Consumption	880 VA (Standard) / 1,320 VA (IPC)
Air Pressure	6 bar (87 psi)
Air Consumption	78.5 NL/min (2.8 CFM) (for optional Lot/Date printer)
Machine Dimensions (L x W x H)	3,080 x 1,295 x 1,580 mm (10'-1.3" x 4'-3" x 5'-2.2") (Standard) 3,080 x 1,355 x 1,580 mm (10'-1.3" x 4'-5.3" x 6'-7.9") (IPC)
Machine Weight	370 kg (815 lbs)
Noise Level	≤ 75 dB


Technical data contained in this material are not binding and may be subject to change without prior notice.

## MACHINE LAYOUTS


### Top View

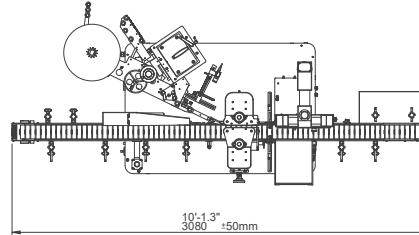

### Front View

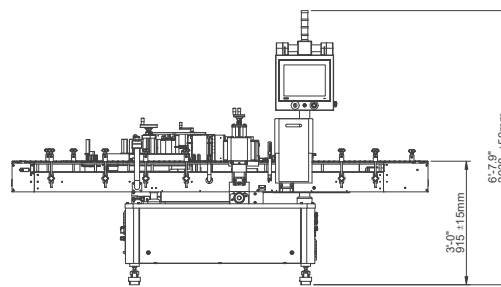

### Side view



### AVAILABLE OPTIONS

- Clear Label Sensor
- Bar Code Verification
- Missing Imprint Check system
- Missing Label on Bottle Check
- Bottle Sorting and Verification
- 3-Color Tower Stack Light
- Bottle Feed Screw
- Infeed Rotary Table / Rotary Accumulation Table
- Infeed and outfeed Conveyor Extensions
- IPC (21CFR)



• Bottle Reject System

Technical data contained in this material are not binding and may be subject to change without prior notice.



### Contact Us

#### USA

10861 Business Drive, Fontana, CA 92337  
Phone: +1 (909) 355-0311  
[www.cvcusa.com](http://www.cvcusa.com) ; [www.cvctechnologies.com](http://www.cvctechnologies.com)  
[sales@cvcusa.com](mailto:sales@cvcusa.com)

#### Taiwan-Asia Pacific Headquarters

Phone: +886 (4) 2496-3666  
[sales@cvctechnologies.com](mailto:sales@cvctechnologies.com)

#### India

Phone: +91 (22) 2562-1242, +91 (22) 2562-1243  
[sales@cvctechnologies.com](mailto:sales@cvctechnologies.com)

#### China

Phone: +86 (512) 8363-6368  
[sales@cvctechnologies.com](mailto:sales@cvctechnologies.com)